



## EU Type Examination Certificate

Date: 2026/02/06

n. **929260602/OE**

Validity: 2031/02/05

This Certificate cancels the previous one n° 929224102/OE dated 2022/10/12.

The hereunder described items of Personal Protective Equipment have overcome positively the "EU type examination" (Module B), proving their conformity to the safety and health requirements of the Regulation (EU) 2016/425 (Annex II)

Manufacturer: (Responsible of the PPE)	<b>OREGON TOOL GmbH</b> Lise-Meitner-Straße 4 – 70736 Fellbach – Germany
Type of PPE:	<b>Safety footwear</b> in conformity with <b>EN ISO 20345:2022+A1:2024 class I</b> (= footwear made from leather and other materials) + <b>EN ISO 17249:2013 against mechanical chainsaw cutting</b>
Category of PPE:	<b>III</b> : "severe" risks. the certificate shall be reconfirmed by the annual surveillance (module C2 or D)
Model	<b>"XX73124 (*)"</b> (orange) KOX DUE
Description:	<p><b>Construction 1:</b> <u>model:</u> C (half-knee boot); <u>fastening system:</u> by means of laces; <u>processing:</u> Ago; <u>sole:</u> black rubber with crampon declared oil-resistant, heat-resistant and antistatic (Gabri 570); <u>outer toetip reinforcement:</u> black coated microfiber (MLCA); <u>upper:</u> orange Nubuck leather declared water resistant and 2-2,2 mm thick (TNDB orange), with a comb-over in the bellows and lacing areas made of black Nubuck leather declared 1,8-2,0 mm thick (TNDB black) and black coated microfiber insert in the upper lacing, ankle and heel counter areas (MLCA); <u>chain saw cut resistant insert:</u> white fabric, declared 8-layer high-toughness "Engtex" (Engtex); <u>collar:</u> fabric with black coating (SCG874), orange perforated Nubuck leather declared thickness 1mm (TNSDB) and rear comb-over made of black fabric "Lycra" (LVG); <u>tongue/bellows:</u> black leather declared thickness 1 mm (SNCC), centrally reinforced with the same leather as that of the upper (TNDB orange); <u>vamp, quarter and heel-grip lining:</u> black and grey herringbone knitting with Tepor membrane (TSG PIDIGI) that also covers the insole; <u>tongue and collar lining:</u> black three-dimensional knitting (SOLAR PIDIGI); <u>insole**:</u> white multi-layered fabric, art. "Lenzi Premium MXC" (LENZI PREMIUM MXC), <u>which also serves as penetration resistant insert</u>, coupled with rigid polymeric insole <u>removable insock**:</u> recycled bidensity PU black/light blue, perforated, coupled with black fabric in contact with the user (Molo-06 SECAL); <u>toecap:</u> varnished steel, art. "2443 SMAL".</p> <p><b>** Construction 2</b>, as an alternative to construction 1: <u>insole:</u> white multi-layered fabric, art. "Texon Enigma Zero HT2" (TEXON ENIGMA ZERO HT2), <u>which also serves as penetration resistant insert</u>, coupled with rigid polymeric insole; <u>removable insock:</u> grey foam material (PTS SECAL) coupled with grey knitting in contact with the user and with heel seat lining covered by black knitting applied on the lower area.</p>

(\*) This article is available also in the variant **XX73131** (red) which differs from the main model for the color of the upper.





## EU Type Examination Certificate

Date: 2026/02/06

n. **929260602/OE**

Validity: 2031/02/05

Technical Standard: **EN ISO 20344:2021+A1:2024** Personal protective equipment – Test methods for footwear  
**EN ISO 20345:2022+A1:2024** Personal protective equipment – Safety footwear  
**EN ISO 17249:2013** Safety footwear with resistance to chain saw cutting

Intended use: woodcutters, forest rangers, farmers and alike (foot protection for works implying the use of a chainsaw)

Size range: from 38 to 48

Technical File: **DC-21029/E**

Test report: **RCT n°4504092/E**

Functions and performance levels: **basic requirements for safety footwear (SB)** (see Table 2 and 3 of EN ISO 20345:2022+A1:2024): all mandatory ones, among which:

**Slip resistance** = slip resistance on ceramic tile floor with NaLS.

**Additional requirements** (Tab. 16 and 20 of EN ISO 20345:2022+A1:2024):

**S7L** = closed seat region, antistatic properties, energy absorption of seat region, water penetration and absorption, perforation resistance: Type PL, cleated outsole, water resistance; **FO** = resistance to fuel oil; **HRO** = resistance to hot contact; **HI** = heat insulation of outsole complex; **CI** = cold insulation of outsole complex; **SR** = slip resistance on ceramic tile floor with glycerine.

**Furthermore, the footwear meets the requirements for footwear with resistance to chain saw cutting** (see **EN ISO 17249:2013**) – **LEVEL: 2** (chain speed: 24 m/s).

Marking:



LEV 2 24 M/S

On a label stitched onto the tongue and including the following information:

- **CE Marking** + number of the Notified Body in charge of the annual control of the PPE;
- registered Trademark (KOX) + name and complete address of the Manufacturer;
- identification of the product (alphanumeric article code) + country code (D);
- size of the footwear;
- month and year of production;
- nr./year of the two Technical Standards of reference + safety symbols;
- pictogram referred to the EN ISO 17249 with indication of the level reached (on the external side of the footwear);
- additional info: batch number, "made in...".





## EU Type Examination Certificate

Date: 2026/02/06

n. **929260602/OE**

Validity: 2031/02/05

**KKK 42**

Lotto 15

**XX73124 01/26**

**DCE 0498**

EN ISO 20345:2022+A1:2024

S7L-HRO-HI-CI-FO-SR

EN ISO 17249:2013


Made in Romania

**Oregon Tool GmbH**

Lise-Meitner-Strasse, 4

**70736 FELLBACH**

DEUTSCHLAND

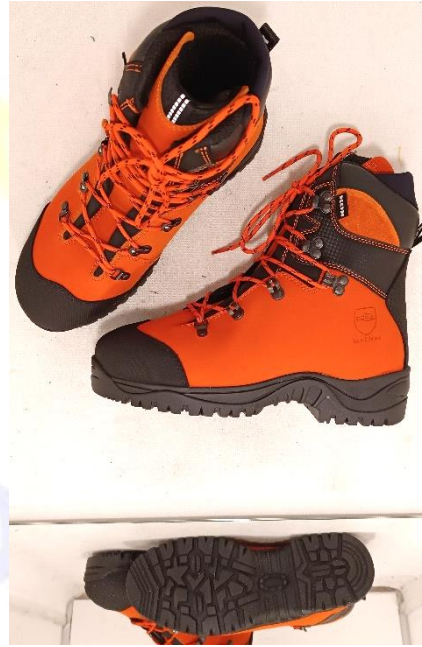

**KKK 43**

Lotto 104

**XX73131 01/26**

**DCE 0498**

EN ISO 20345:2022+A1:2024

S7L-HRO-HI-CI-FO-SR

EN ISO 17249:2013

Made in Romania

**Oregon Tool GmbH**

Lise-Meitner-Strasse, 4

**70736 FELLBACH**

DEUTSCHLAND



NOTE: the Technical File contains a more detailed description of the PPE (material, method of assembly, photographs or drawings), performance data, safety functions and level of protection, elements of conformity to the basic and supplementary requirements.  
The Technical File is integral part of the present Certification, which has to be kept available by the applicant to be forwarded - upon request - to the entitled person (supervising body, Controlling Officer).

